


UNEVA

EFFICIENCY FOR LIFE

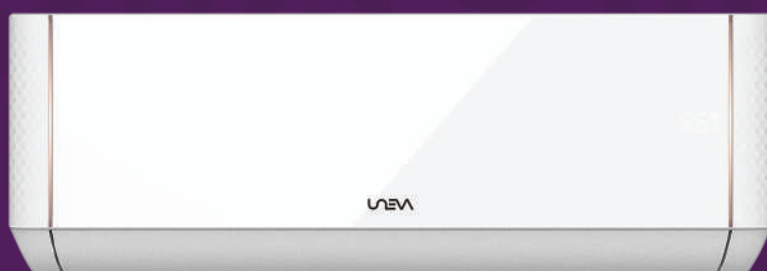


AIR CONDITIONERS

2023
CATALOGUE

Distributed Healthy Filter System

Top Opened Filter
Integrated High Density Filter

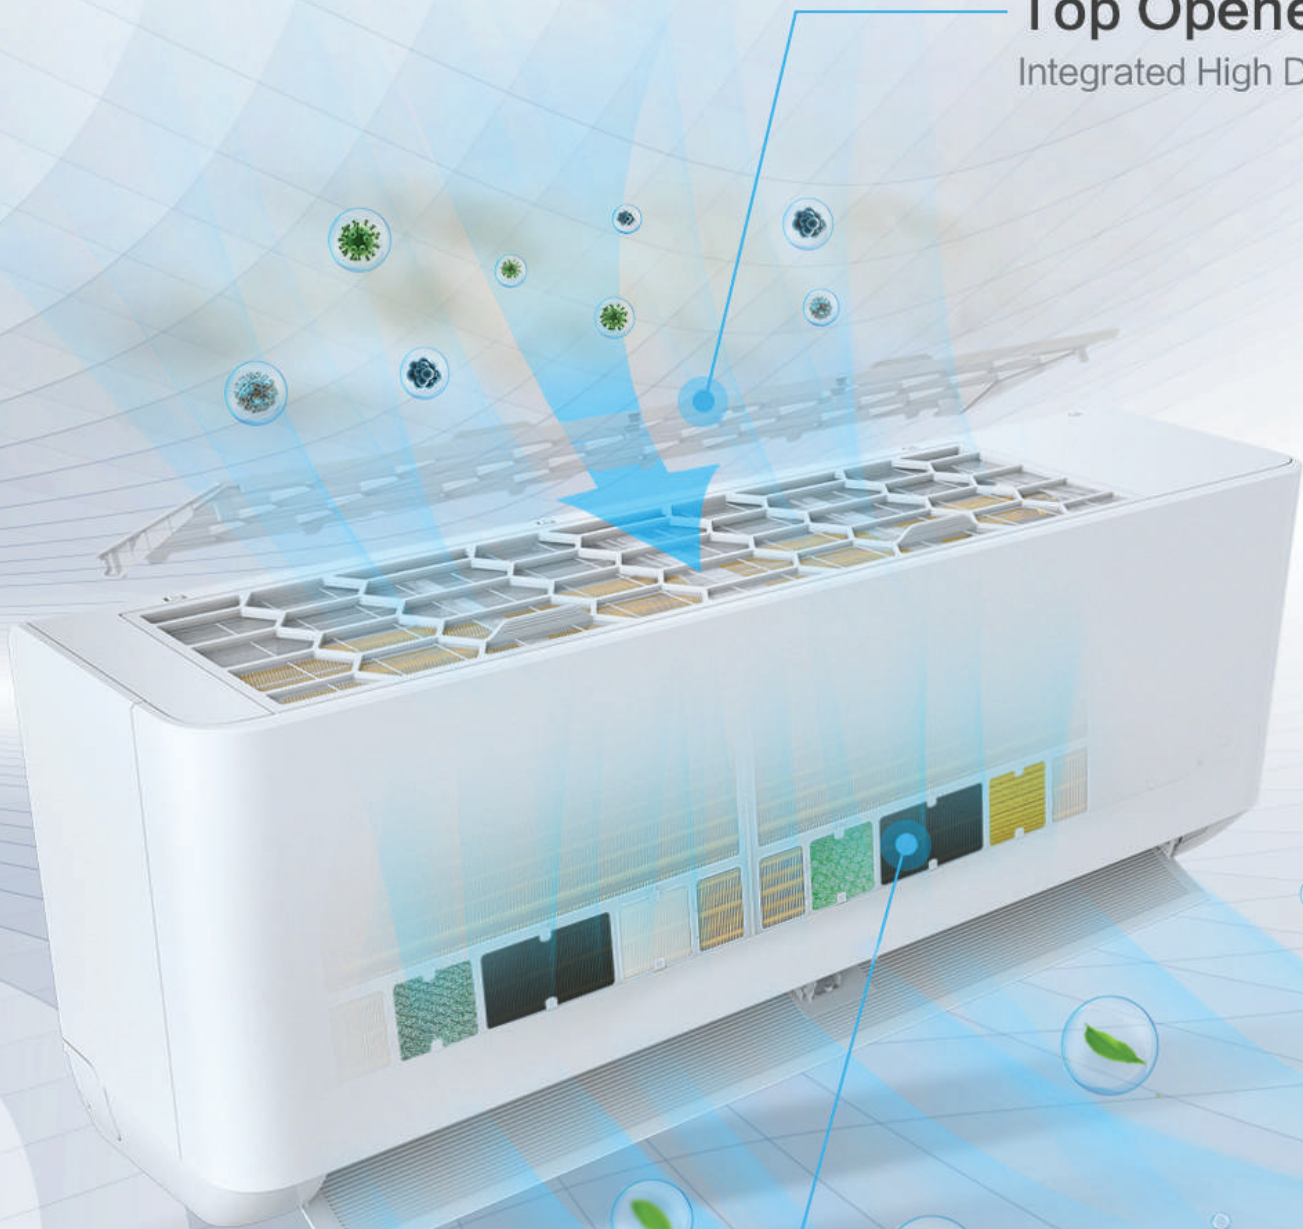

Healthy Filters *
Multiple Options for Each AC


UNEVA
HEALTHY BREEZE

Strong Cooling in High Ambient Temperature


No cooling capacity decline in 50°C ambient.

Nonstop cooling in 60°C ambient temperature.

Air-cooled electric control box technology is applied to effectively cool down temperature of electric parts in outdoor unit.

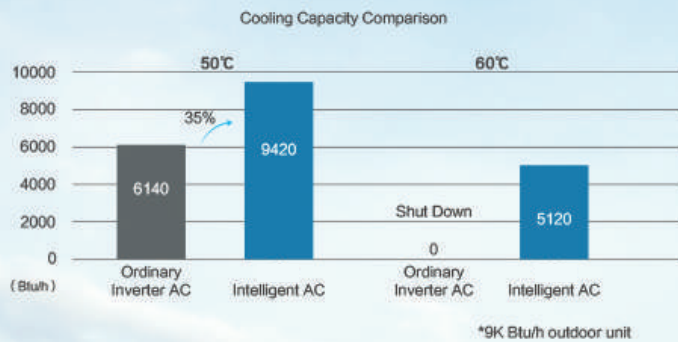

60°C

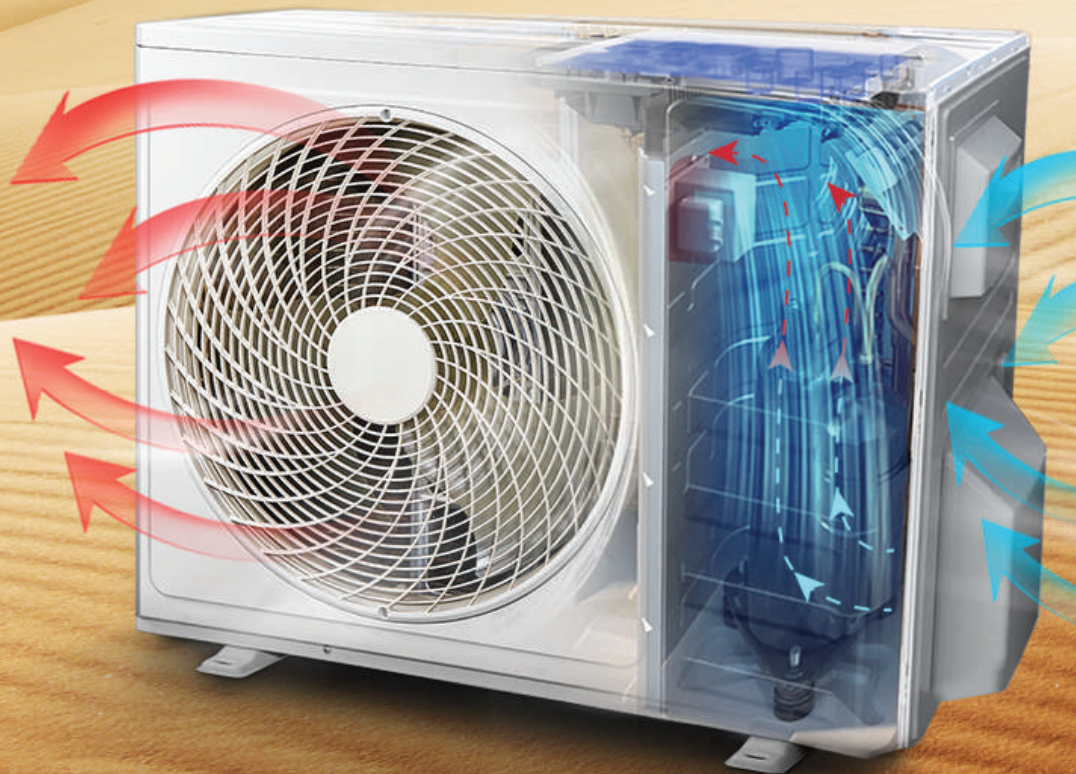

UNEVA
EXTREME COOLING



Split

GMCC R410A - T3



Inverter Plus



Ampere Control



T3 Climate



Golden Fin



Hygiene Plus



Turbo Fan



Fast Cooling



Quiet



4-Way auto Swing

Model name	UN-TS12000 TITANIUM	UN-TS18000 TITANIUM	UN-TS24000 TITANIUM
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Ampere levels	L1 (2A) - L2 (3A) - L3 (4A)	L1 (3A) - L2 (4A) - L3 (6A)	L1 (3A) - L2 (5A) - L3 (7A)
Cooling			
Capacity ^(Btu/h)	12000	18000	24000
Rated current ^(A)	6.1	9	9.4
EER ^(Btu/h/w)	8.19	8.19	8.19
Heating			
Capacity ^(Btu/h)	12500	18500	24500
Rated current ^(A)	4.8	7.1	9.4
COP ^(w/w)	12.30	12.30	12.30
Compressor & Features			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	GMCC
Indoor air flow ^(m3/h)	710	810	1350
Indoor sound level ^{(dB(A))}	42	46	50
Refrigerant type	R410A	R410A	R410A
Loading quantity/HQ	270	177	124
Outdoor unit			
Dimensions ^(W*D*H)	795*305*549	853*349*602	967*421*803
Net weight ^(KG)	24.5	30	59
Number of rows	1	2	2
Indoor unit			
Dimensions ^(W*D*H)	820*306*195	920*306*195	1100*333*222
Net weight ^(KG)	9.5	10.5	15



Split

GREE R410A - T3



Inverter Plus



Ampere Control



T3 Climate



Golden Fin



Wi-Fi Support



Turbo Fan



Fast Cooling




Quiet



4-Way auto Swing

Model name	UN-GS30000 PORSCHE
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Ampere levels	L1 (4A) - L2 (9A) - L3 (12A)
Cooling	
Capacity ^(Btu/h)	30000
Rated current ^(A)	12.5
EER ^(Btu/h/w)	11
Heating	
Capacity ^(Btu/h)	30700
Rated current ^(A)	12.5
COP ^(W/W)	11
Compressor & Features	
Type	ROTARY
Brand	
Indoor air flow ^(m3/h)	1350
Indoor sound level ^{(dB(A))}	52
Refrigerant type	R410A
Loading quantity/HQ	114
Outdoor unit	
Dimensions ^(W*D*H)	1000*746*427
Net weight ^(KG)	52.5
Number of rows	2
Indoor unit	
Dimensions ^(W*D*H)	1078*333*246
Net weight ^(KG)	15

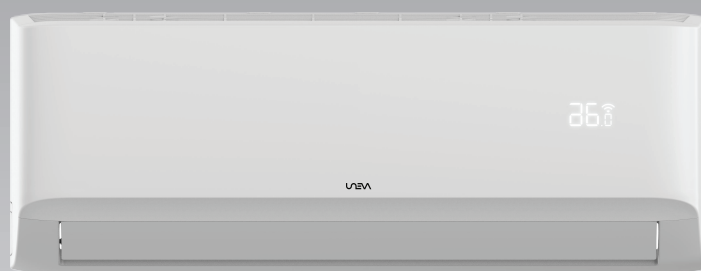

Split

GMCC R410A - T3



Inverter Plus



Ampere Control



T3 Climate



Golden Fin



Hygiene Plus



Turbo Fan



Fast Cooling



Quiet



4-Way auto Swing

Model name	UN-MS12 INFINITY	UN-MS18 INFINITY	UN-MS24 INFINITY
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Ampere levels	L1 (3A) - L2 (5A)	L1 (4A) - L2 (6A)	L1 (6A) - L2 (8A)
Cooling			
Capacity ^(Btu/h)	12000	18000	24000
Rated current ^(A)	5.1	7.39	9.9
EER ^(Btu/h/w)	7.1	7	6.1
Heating			
Capacity ^(Btu/h)	13000	19000	25000
Rated current ^(A)	4.8	6.31	10.7
COP ^(W/W)	4	4.1	4
Compressor & Features			
Type	ROTARY	ROTARY	TWIN-ROTARY
Brand	GMCC	GMCC	GMCC
Indoor air flow ^(m3/h)	584	730	1020
Indoor sound level ^{(dB(A))}	36	41.5	45
Refrigerant type	R410A	R410A	R410A
Loading quantity/HQ	205	188	145
Outdoor unit			
Dimensions ^(W*D*H)	805*330*554	805*330*554	890*342*673
Net weight ^(KG)	27.1	32.3	44.4
Number of rows	1	2	2
Indoor unit			
Dimensions ^(W*D*H)	802*189*297	365*215*319	1080*226*335
Net weight ^(KG)	8.6	10.9	13.7



Split

Copeland® Piston - T3



T3 Climate



Golden
Fin



Hygiene
Plus



Turbo
Fan



Fast
Cooling



Quiet



Hidden
LED



4-Way auto
Swing

Model name	UN-MP18	UN-MP24
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity ^(Btu/h)	18000	24000
Rated current ^(A)	9.28	12.39
EER ^(Btu/h/w)	6.99	7.51
Heating		
Capacity ^(Btu/h)	/	/
Rated current ^(A)	/	/
COP ^(W/W)	/	/
Compressor & Features		
Type	PISTON	PISTON
Brand	Copeland®	Copeland®
Indoor air flow ^(m3/h)	830	1150
Indoor sound level ^{(dB(A))}	45	48.5
Refrigerant type	R22	R22
Loading quantity/HQ	160	110
Outdoor unit		
Dimensions ^(W*D*H)	845*363*702	946*410*810
Net weight ^(KG)	54.1	69.3
Number of rows	2	2
Indoor unit		
Dimensions ^(W*D*H)	965*215*319	1080*226*335
Net weight ^(KG)	11.5	14.2



Split

Copeland® Piston - T3



T3 Climate


Golden
Fin

Hygiene
Plus

Turbo
Fan

Fast
Cooling


Quiet


Hidden
LED

4-Way auto
Swing

Model name	UN-MP30	UN-MP36
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity ^(Btu/h)	30000	36000
Rated current ^(A)	16.7	16.79
EER ^(Btu/h/w)	7.40	7.85
Heating		
Capacity ^(Btu/h)	/	/
Rated current ^(A)	/	/
COP ^(w/w)	/	/
Compressor & Features		
Type	PISTON	PISTON
Brand	Copeland®	Copeland®
Indoor air flow ^(m3/h)	1500	1500
Indoor sound level ^{(dB(A))}	52	52
Refrigerant type	R22	R22
Loading quantity/HQ	96	96
Indoor unit		
Dimensions ^(W*D*H)	946*410*810	946*410*810
Net weight ^(KG)	77.2	82.2
Number of rows	3	3
Outdoor unit		
Dimensions ^(W*D*H)	1259*282*362	1259*282*362
Net weight ^(KG)	22.1	22.4



Split

GMCC R410A



Model name	UN-MS12 LUX	UN-MS18 LUX	UN-MS24 LUX
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling			
Capacity ^(Btu/h)	12000	18000	24000
Rated current ^(A)	5.2	7.71	10
EER ^(Btu/h/w)	2.81	2.81	3.01
Heating			
Capacity ^(Btu/h)	12500	16550	27000
Rated current ^(A)	5.0	7	10
COP ^(W/W)	3.21	3.01	3.41
Compressor & Features			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	GMCC
Indoor air flow ^(m3/h)	575	810	1000
Indoor sound level ^{(dB(A))}	39	43.5	47.5
Refrigerant type	R410A	R410A	R410A
Loading quantity/HQ	265	192	147
Outdoor unit			
Dimensions ^(W*D*H)	720*270*495	805*330*554	890*342*673
Net weight ^(KG)	26.5	37.6	53
Number of rows	1	1.6	1.6
Indoor unit			
Dimensions ^(W*D*H)	805*194*285	957*213*302	1040*220*327
Net weight ^(KG)	8.2	11.4	13.2



Split

GMCC R410A - T3



T3 Climate



Golden
Fin



Hygiene
Plus



Turbo
Fan



Fast
Cooling



Quiet



Hidden
LED



4-Way auto
Swing

Model name	UN-MS18 ULTRA	UN-MS24 ULTRA	UN-MS30 ULTRA
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling			
Capacity ^(Btu/h)	18000	24000	30000
Rated current ^(A)	7.2	9.5	11.70
EER ^(Btu/h/w)	3.26	3.26	3.3
Heating			
Capacity ^(Btu/h)	19500	25200	30500
Rated current ^(A)	7.75	9.4	10.9
COP ^(W/W)	3.3	3.47	3.66
Compressor & Features			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	GMCC
Indoor air flow ^(m3/h)	855	1200	1460
Indoor sound level ^{(dB(A))}	45	48	52
Refrigerant type	R410A	R410A	R410A
Loading quantity/HQ	148	145	96
Outdoor unit			
Dimensions ^(W*D*H)	890*342*673	890*342*673	946*410*810
Net weight ^(KG)	47.8	50.4	63.9
Number of rows	1.6	2	2
Indoor unit			
Dimensions ^(W*D*H)	965*215*319	1080*226*335	1260*283*362
Net weight ^(KG)	11.6	14.8	21.8



Split

GMCC R410A

Golden
FinHygiene
PlusTurbo
FanFast
Cooling

Quiet

Hidden
LED4-Way auto
Swing

Model name	UN-MS12C LUX
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	
Capacity ^(Btu/h)	12000
Rated current ^(A)	4.7
EER ^(Btu/h/w)	3.01
Heating	
Capacity ^(Btu/h)	/
Rated current ^(A)	/
COP ^(W/W)	/
Compressor & Features	
Type	ROTARY
Brand	GMCC
Indoor air flow ^(m3/h)	566
Indoor sound level ^{(dB(A))}	38.5
Refrigerant type	R410A
Loading quantity/HQ	265
Outdoor unit	
Dimensions ^(W*D*H)	720*270*495
Net weight ^(KG)	25.2
Number of rows	1
Indoor unit	
Dimensions ^(W*D*H)	805*194*285
Net weight ^(KG)	8.1



Split

GMCC T3



T3 Climate



Golden
Fin



Hygiene
Plus



Turbo
Fan



Fast
Cooling



Quiet



Hidden
LED



4-Way auto
Swing

Model name	UN-MS18C ULTRA	UN-MS24C ULTRA
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity ^(Btu/h)	18000	24000
Rated current ^(A)	8.0	12.6
EER ^(Btu/h/w)	3.05	2.82
Heating		
Capacity ^(Btu/h)	/	/
Rated current ^(A)	/	/
COP ^(W/W)	/	/
Compressor & Features		
Type	ROTARY	ROTARY
Brand	GMCC	GMCC
Indoor air flow ^(m³/h)	800	1200
Indoor sound level ^{(dB(A))}	44	49
Refrigerant type	R22	R22
Loading quantity/HQ	148	145
Outdoor unit		
Dimensions ^(W*D*H)	890*342*673	890*342*673
Net weight ^(KG)	43.4	47.8
Number of rows	1.6	2
Indoor unit		
Dimensions ^(W*D*H)	965*215*319	1080*226*335
Net weight ^(KG)	11.7	15




Golden
Fin


Hygiene
Plus


Double
Fan


Fast
Cooling


Inverter
Plus


Quiet


ECO
Friendly


Hidden
LED


Ampere
Control


T3 Climate


Auto
Restart


4-Way auto
Swing

Floor standing

HIGHLY R410A | T3

Model name	UN-TF60D TITANUM
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	
Capacity ^(Btu/h)	60000
Rated current ^(A)	29
EER ^(Btu/h/w)	8
Heating	
Capacity ^(Btu/h)	62000
Rated current ^(A)	26.7
COP ^(W/W)	11
Compressor & Features	
Type	ROTARY
Brand	HIGHLY
Indoor air flow ^(m3/h)	2100
Indoor sound level ^{(dB(A))}	49
Refrigerant type	R410A
Loading quantity/HQ	45
Outdoor unit	
Dimensions ^(W*D*H)	1000*400*1250
Net weight ^(KG)	/
Number of rows	1
Indoor unit	
Dimensions ^(W*D*H)	1918*600*390
Net weight ^(KG)	/



Golden
Fin



Hygiene
Plus



Double
Fan



Fast
Cooling



Timer



Quiet



ECO
Friendly



Hidden
LED



T3 Climate



Auto
Restart



4-Way auto
Swing

Floor standing

LG R410A | T3

Model name	UN-MF60D ULTRA
Power supply ^(V-Ph-Hz)	380-415V, 50Hz, 3Ph
Cooling	
Capacity ^(Btu/h)	60000
Rated current ^(A)	9.7
EER ^(Btu/h/w)	2.33
Heating	
Capacity ^(Btu/h)	60000
Rated current ^(A)	8.6
COP ^(W/W)	3.66
Compressor & Features	
Type	SCROLL
Brand	LG
Indoor air flow ^(m3/h)	2470
Indoor sound level ^{(dB(A))}	56
Refrigerant type	R410A
Loading quantity/HQ	40
Outdoor unit	
Dimensions ^(W*D*H)	952*415*1333
Net weight ^(KG)	105.2
Number of rows	2
Indoor unit	
Dimensions ^(W*D*H)	600*455*1934
Net weight ^(KG)	59.3



Golden
Fin



Hygiene
Plus



Double
Fan



Fast
Cooling



Timer



Quiet



ECO
Friendly



Hidden
LED



T3 Climate



Auto
Restart



4-Way auto
Swing

Floor standing

Copeland® R410A | T3

Model name	UN-MF36D SCROLL
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph
Cooling	
Capacity ^(Btu/h)	36000
Rated current ^(A)	19.4
EER ^(Btu/h/w)	2.29
Heating	
Capacity ^(Btu/h)	/
Rated current ^(A)	/
COP ^(W/W)	/
Compressor & Features	
Type	SCROLL
Brand	Copeland
Indoor air flow ^(m3/h)	1690
Indoor sound level ^{(dB(A))}	48
Refrigerant type	R410A
Loading quantity/HQ	42
Outdoor unit	
Dimensions ^(W*D*H)	900*350*1170
Net weight ^(KG)	87.5
Number of rows	2
Indoor unit	
Dimensions ^(W*D*H)	600*455*1934
Net weight ^(KG)	59.3



Golden
Fin



Hygiene
Plus



Double
Fan



Fast
Cooling



Timer



Quiet



ECO
Friendly



Hidden
LED



T3 Climate



Auto
Restart



4-Way auto
Swing

Floor standing

SANYO R410A | T3

Model name	UN-TF48D SCROLL
Power supply ^(V-Ph-Hz)	380V, 50Hz, 3Ph
Cooling	
Capacity ^(Btu/h)	48000
Rated current ^(A)	20.2
EER ^(Btu/h/w)	11.26
Heating	
Capacity ^(Btu/h)	49000
Rated current ^(A)	21.1
COP ^(W/W)	11
Compressor & Features	
Type	SCROLL
Brand	SANYO
Indoor air flow ^(m3/h)	1950
Indoor sound level ^{(dB(A))}	55
Refrigerant type	R410A
Loading quantity/HQ	45
Outdoor unit	
Dimensions ^(W*D*H)	2040*690*515
Net weight ^(KG)	105
Number of rows	2
Indoor unit	
Dimensions ^(W*D*H)	1918*600*390
Net weight ^(KG)	55



Window

GMCC T3



T3 Climate



Golden
Fin



Hygiene
Plus



Turbo
Fan



Fast
Cooling



Quiet



Hidden
LED



4-Way auto
Swing

Model name	UN-MW9C ULTRA	UN-MW12C ULTRA
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity ^(Btu/h)	9000	12000
Rated current ^(A)	4.5	5.8
EER ^(Btu/h/w)	2.6	2.77
Heating		
Capacity ^(Btu/h)	/	/
Rated current ^(A)	/	/
COP ^(W/W)	/	/
Compressor & Features		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow ^(m3/h)	360	450
Indoor sound level ^{(dB(A))}	53	51
Refrigerant type	R22	R22
Loading quantity/HQ	572	342
Outdoor unit		
Dimensions ^(W*D*H)	/	/
Net weight ^(KG)	/	/
Number of rows	2	2
Indoor unit		
Dimensions ^(W*D*H)	450*535*346	600*560*380
Net weight ^(KG)	27	36



Window

GMCC T3



T3 Climate



Golden
Fin



Hygiene
Plus



Turbo
Fan



Fast
Cooling



Quiet



Hidden
LED



4-Way auto
Swing

Model name	UN-MW18C ULTRA	UN-MW24 ULTRA
Power supply ^(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity ^(Btu/h)	18000	24000
Rated current ^(A)	11.02	12.5
EER ^(Btu/h/w)	1.92	1.9
Heating		
Capacity ^(Btu/h)	/	11000
Rated current ^(A)	/	15.7
COP ^(W/W)	/	0.89
Compressor & Features		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow ^(m3/h)	730	805
Indoor sound level ^{(dB(A))}	56	58
Refrigerant type	R22	R22
Loading quantity/HQ	225	225
Outdoor unit		
Dimensions ^(W*D*H)	/	/
Net weight ^(KG)	/	/
Number of rows	2	2
Indoor unit		
Dimensions ^(W*D*H)	660*680*428	660*680*428
Net weight ^(KG)	52	56.5



EFFICIENCY FOR LIFE

AIR CONDITIONERS



2023

WWW.UNEVA.CO